



# bluglass Tower **hot**



## BLUGLASS TOWER ONE HOT

Supply	230 V - 50 Hz
Absorbed power	30 W - 0,19 A
Inlet water pipe	Ø5/16" (8 mm)
Dispensing area height (mm)	260
Typology	Electronic tap
Net weight (kg)	8
Gross weight (kg)	10
Dimensions W x D x H (mm)	142 x 209 x 455
Packaging dimensions (mm)	800 x 260 x 255
Dispensing options	Cold still water, cold sparkling water and hot water
Materials	Robust stainless steel and tempered glass
Push buttons	Stainless steel push buttons

## OTHER CHARACTERISTICS


It can be connected to any type of under counter cooler.

## OPTIONAL

Stainless steel drip tray

Filters UV OUT (4 W)

*For a proper installation of the system, the use of the WATER BLOCK is compulsory.*

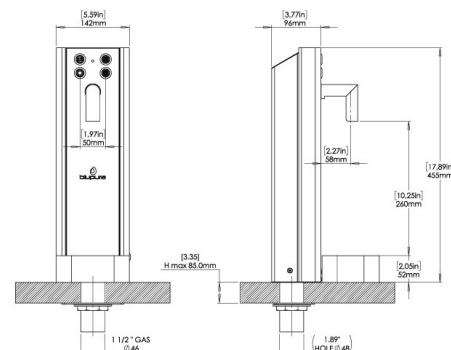

## CERTIFICATIONS



UNI EN ISO 9001:2015  
UNI EN ISO 14001:2015